


# Curaflex Nova® KFR



- Cut-out for duct systems
- For use in **new constructions**
- For **waterproof concrete structures** (white tank)
- For **element walls**
- For use with **sealants applied in liquid form** (black tank)
- With **bonding flange** according to DIN 18533



## PRODUCT BENEFITS


- Optimally designed inner wall for holding the DOYMA sealing systems and building services duct system
- For waterproof concrete structures (white tank)
- Suitable for element walls
- With bonding flange for on-site application of:
  - Thick coating (KMB/PMBC) for pressing water (W2.1-E)
  - Flexible polymer-modified thick coatings (FPMC) for pressing water up to 3 m water column (W2.1-E)
  - Mineral sealing slurry (MSS) or liquid plastic (LP) for non-pressing water (W1-E or W3-E)
  - Fresh concrete composite film (FCC)
- Length scale simplifies on-site length adjustment
- Can be extended on site with component thickness > 500 mm
- Low weight
- Fixing eyelets enable variable fixing in reinforcement

## TECHNICAL DETAILS

- Gas- and watertight
- Certified in accordance with FHRK test standard GE 102
- Radon-proof according to FHRK leaflet MB 101; meets requirements for radon precautionary areas

## MATERIAL:

- 100% recycled ABS
- PE sealing cover

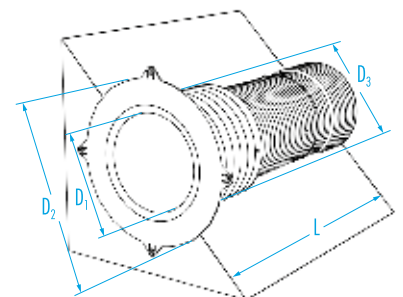

## Curaflex Nova® KFR

Inner diameter of pipe sleeve D <sub>1</sub> [DN in mm]	Length L [mm]	Outer diameter of bonding flange D <sub>2</sub> [mm]	Outer diameter of pipe sleeve D <sub>3</sub> max. [mm]	Article number
100	300	205	138	1 10 0 100 300 0 9
100	500	205	138	1 10 0 100 500 0 9
150	300	255	188	1 10 0 150 300 0 9
150	500	255	188	1 10 0 150 500 0 9
200	300	305	238	1 10 0 200 300 0 9
200	500	305	238	1 10 0 200 500 0 9